


エルボ

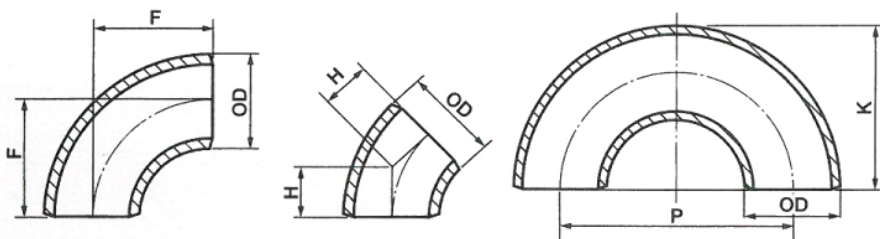

ロングエルボ

単位:mm

呼径	外形OD	中心から端面までの距離		中心から中心 までの距離	背から端面 までの距離	概略重量 kg 90 E (L)				
		F	H	P	K	SGP	S40	S80	S120	S160
1/2	21.7	38.1	15.8	76.2	49.0	0.078	0.078	0.098		0.118
3/4	27.2	38.1	15.8	76.2	51.7	0.101	0.104	0.134		0.176
1	34.0	38.1	15.8	76.2	55.1	0.145	0.153	0.196		0.260
1 1/4	42.7	47.6	23.7	95.2	69.0	0.253	0.259	0.341		0.428
1 1/2	48.6	57.2	23.7	114.4	81.5	0.349	0.368	0.491		0.652
2	60.5	76.2	31.6	152.4	106.5	0.635	0.651	0.892		1.33
2 1/2	76.3	95.3	39.5	190.6	133.5	1.12	1.36	1.79		2.34
3	89.1	114.3	47.3	228.6	158.9	1.58	2.03	2.74		3.83
3 1/2	101.6	133.4	55.3	266.8	184.2	2.11	2.82	3.91		5.83
4	114.3	152.4	63.1	304.8	209.6	2.91	3.83	5.36	6.76	8.03
5	139.8	190.5	78.9	381.0	260.4	4.49	6.48	9.13	11.9	14.5
6	165.2	228.6	94.7	457.2	311.2	7.09	9.93	15.0	19.1	23.7
8	216.3	304.8	126.3	609.6	413.0	14.4	20.1	30.5	42.5	52.4
10	267.4	381.0	157.8	762.0	514.7	25.4	35.4	56.2	77.6	101.0
12	318.5	457.2	189.4	914.4	616.5	38.0	56.2	92.7	132.0	168.0
14	355.6	533.4	220.9	1066.8	711.2	56.7	78.9	132.0	188.0	236.0
16	406.4	609.6	252.5	1219.2	812.8	74.3	118.0	194.0		350.0
18	457.2	685.8	284.1	1371.6	914.4	94.2	168.0	274.0		
20	508.0	762.0	315.6	1524.0	1016.0	116.0	219.0	372.0		

ショートエルボ

単位:mm

呼径	外形OD	中心から端面までの距離		中心から中心 までの距離	背から端面 までの距離	概略重量 kg 90 E (L)				
		F	H	P	K	SGP	S40	S80	S120	S160
1	34.0	25.4		50.8	42.4	0.097	0.102	0.130		
1 1/4	42.7	31.8		63.6	53.2	0.169	0.173	0.228		
1 1/2	48.6	38.1	15.8	76.2	62.4	0.233	0.245	0.327		0.434
2	60.5	50.8	21.0	101.6	81.1	0.423	0.434	0.595		0.886
2 1/2	76.3	63.5	26.3	127.0	101.7	0.744	0.909	1.19		1.56
3	89.1	76.2	31.6	152.4	120.8	1.05	1.36	1.83		2.55
3 1/2	101.6	88.9	36.8	177.8	139.7	1.41	1.88	2.61		
4	114.3	101.6	42.1	203.2	158.8	1.94	2.55	3.57	4.50	5.35
5	139.8	127.0	52.6	254.0	196.9	2.99	4.32	6.08	7.93	9.68
6	165.2	152.4	63.1	304.8	235.0	4.72	6.62	10.0	12.7	15.8
8	216.3	203.2	84.2	406.4	311.4	9.6	13.4	20.3	28.4	35.0
10	267.4	254.0	105.2	508.0	387.7	16.9	23.6	37.4	51.7	67.1
12	318.5	304.8	126.2	609.6	464.1	25.4	37.4	61.8	87.8	112.0
14	355.6	355.6	147.3	711.2	533.4	37.8	52.6	88.0	125.0	157.0
16	406.4	406.4	168.3	812.8	609.6	49.5	78.6	130.0		233.0
18	457.2	457.2	189.4	914.4	685.8	62.8	112.0	183.0		
20	508.0	508.0	210.4	1016.0	762.0	77.7	146.0	248.0		